

## Rowley project list: **Table Cloth**

Table cloths are a fast and easy way to add drama to a table. They set the framework for additional layers that can be quick up-sales for your business. We will only cover the fabrication steps of the table cloth in this project guide.



### MATERIALS & SUPPLIES

#### Rowley Products

Fusible Stabilizer  
 4/32" Micro Welt Cord

#### SKU

**FB11**  
**WC85**

### SILK TABLE CLOTH: STEP-BY-STEP INSTRUCTIONS

Our table measured 78" Long and 39" Wide with an 11" drop to the seat of the chairs. This table cloth was made from one width of fabric. If you need to piece fabric for your specific project, plan for the join seams to fall on the sides of a full width.

- Since the finished length was 94" the cut length was 95".
  - (78" + 8" drop + 8" drop + seam allowance).
- The finished width was 55" the cut width was 56".
  - (39" + 8" + 8" + seam allowance).
- Since all face fabric used was silk, it was first stabilized using Fusible Stabilizer.





### Cutting and Prepping the Fabric:

- 1 Cut the stabilized face fabric to 56" Wide x 95" Long.
- 2 Cut the lining to 56" Wide x 95" Long.
- 3 Cut and make enough micro welt cord to go around all four sides (approx. 300").
  - A. This welt should be cut on the bias.
- 4 Serge welt for a consistent seam allowance.

## Prepping the Table Cloth Together:

- 1 Lay the face fabric face up on the table, smoothing out any wrinkles.
- 2 Glue-baste covered welt cord to the perimeter of the face, clipping the welt lip at the corners.
- 3 Pin in place and allow the glue to dry.

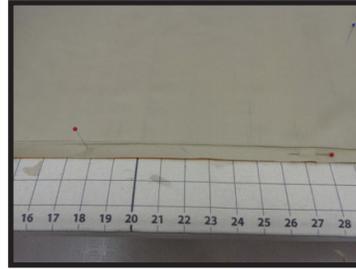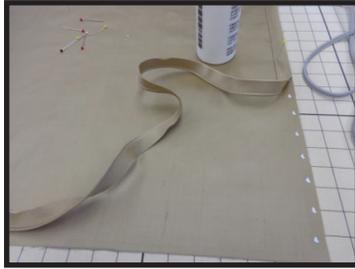

- 4 At the machine, sew the welt to the face piece, making the join in the covered cord as you come to it.
- 5 Back at the table, lay the face piece right side up, smoothing out any wrinkles.
- 6 Lay the lining piece face down on top of the face piece, aligning edges.
- 7 Glue-baste the lining to the face, leaving a small area unglued for turning.



- 8 Once the glue is dry, machine-sew the two pieces together, leaving a small opening for turning.
- 9 Clip off bulk at corners.



- 10 Turn right sides out.
- 11 Press from both the front and the back.
- 12 Fold under seam allowance at the opening. Pin and hand close.